


Section _____ Town _____ Range _____

Aug. 31 1808

I commenced a Survey of Section 33, T. 8th, R. 4th
for Robert Slaliley et al.

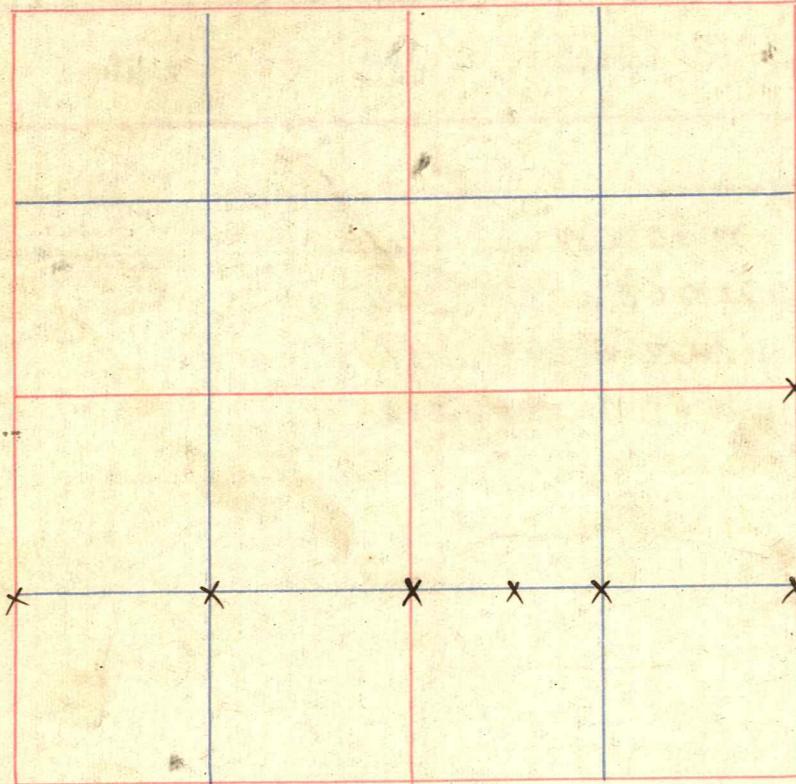

CORNER ESTABLISHED.	Monument.	Device.	WITNESS POINTS OR BEARING TREES.	Mark or Dia. in Inches.	COURSE.	Links Distant.	REMARKS.
E $\frac{1}{4}$ 33-8-4	stone	x	Sycamore Burr oak	12 6	N 49 $\frac{1}{2}$ E S 65 $\frac{1}{2}$ E	94 $\frac{1}{2}$ 108	Found Syc. Beech stumps
E $\frac{1}{4}$ SE	stone	+	Mulberry	4	N 7 E	80-	
W $\frac{1}{4}$ SW	stake		Beech	20	S 8 $\frac{1}{2}$ E	12	
center SW	stake		Black oak	24	N 8 $\frac{1}{2}$ E	6 $\frac{1}{2}$	
E $\frac{1}{4}$ SW	stone	+	Beech	24	N 10 $\frac{1}{2}$ E	12 $\frac{1}{2}$	
13/16 ch W cent. SE	"	+	Mulberry	6	N 69 $\frac{1}{2}$ W	53	
center SE	"	+	Beech	24	N 54 E	14	

Surveyor Greene County.

Var.

Course.	Point of Beginning.	Chains Distance.	Corrected Bearings.
North	SW	40.10	W $\frac{1}{4}$
North	SE	40.08	E $\frac{1}{4}$
West	E $\frac{1}{4}$ SE	80.86	W $\frac{1}{4}$ S W

March 16 1915 Section 36-6-5
Surveyed on county line between Greene
and Laviess Counties established the South East
corner wit Burr oak 20 N 43 $\frac{1}{2}$ E 112 $\frac{1}{2}$ feet Var. 3 $\frac{1}{2}$ ^o
stone to tree all parties interested were present and
gave their consent to establishing corner, the
Laviess County Surveyor was present also.

Elmer O'Neal Co. Surveyor
by G. F. Parker Supt.